

Planters

Implements

Disc Blades

Tillage  
Tools



**MARCHESAN**

**8013 GAPCR HD**  
**9017 GASPCR HD**  
**10020 GASPCR EHD**

**TOUGHER  
THAN EVER**

**Heavy Duty Wheel Offset Disk Harrow**  
**Extra Heavy Duty Wheel Offset Disk Harrow**



**Working Width**  
**9 to 19 ft.**

**RUGGEDLY BUILT**  
**FOR LONGER LIFE**

## Standard Features:

- TATU oil bath bearings assemblies with tapered roller blade and duo-cone seals.
- 1/2" x 6" x 9" rectangular main frame, 1/2" x 5" x 10" gang carriers, reinforced through two-welded "U" profile.
- 2.1/2" round heat treated alloy steel gang axles.
- Casting spacer spools.
- Heat treated boron steel disc blades, notched front and rear.
- Heavy duty disc blade scrapers.
- Recommended (wheels and tires are not included):
  - Two dual 12.5Lx15"-16 ply for 8013 GAPCR HD (8 bolts hub).
  - Two dual 9.0Lx20"-14 ply for 9017 GASPCR HD and 10020 GASPCR EHD (10 bolts hub).
- Stabilizer bar front and rear disc gangs leveling.
- Perforated offset bar to allow lateral adjustments under varying draft conditions.
- Box type construction drawbar with standard draw bar plates.
- Hydraulic controlled depth gauge through rod stops.
- Wheels hubs with two tapered roller bearings on each hub to protect against dust and moisture.
- Adjustable gang axles up to 42 degrees.

## Optional:

- Furrow filler.

## Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Weight per Disc lbs (Kg)	Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing			
8013 GAPCR HD	30	16' 1" (4,900)	32"x9mm,	13.3/8" (340mm)	514 (233)	15,428 (6,998)	300 - 320
	34	18' 0" (5,500)	34"x9mm		467 (212)	15,869 (7,198)	320 - 340
	36	19' 1" (5,800)	36"x9mm		465 (211)	16,750 (7,597)	340 - 360
9017 GASPCR HD	18	11' 7" (3,500)	36"x12mm to	17.5/16" (440mm)	874 (397)	15,737 (7,138)	310 - 330
	20	13' 1" (4,000)	40"x12mm		804 (365)	16,089 (7,298)	330 - 350
10020 GASPCR EHD	12	9' 6" (2,900)	36"x12mm to	19.1/2" (495mm)	992 (450)	11,904 (5,400)	230 - 250
	16	12' 5" (3,800)	40"x12mm		992 (450)	15,873 (7,200)	310 - 330


\* Approx. Net Weight: - 8013 GAPCR HD = 34"x9mm - 9017 GASPCR HD and 10020 GASPCR EHD = 36"x12mm.

\*\* Please note that the tractor draw bar horse power are suggested ranges and vary according to soil conditions and weight added to harrow.

## RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

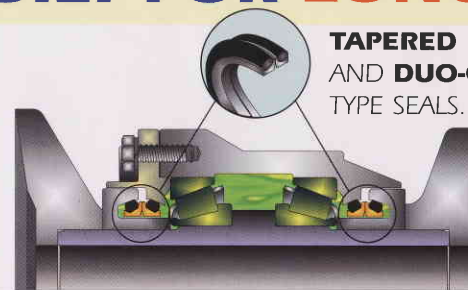

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.

The model **8013 GAPCR HD** is specially designed for tough plowing jobs found in newly cleared forest areas or heavy sugar cane stubble left after the last crop. It performs well in soil preparation applications and leveling of large areas after harvest, breaking clods, eliminating weed seedlings and incorporating trash into the soil profile and to meet the extreme conditions in construction such as clear land, build roads and dams, reclaim mine sites and prepare land for reforestation.

The models **9017 GASPCR HD** and **10020 GASPCR EHD** are specially designed to meet the extreme conditions in construction, build road and dams, deep tillage, tilling new ground and deforested land.



Planters

Implements

Disc Blades

Tillage Tools



MARCHESAN

Gaber Distributors

1-800-463-8748

gaberdst@mts.net

www.gaber.com

Av. Me  
Fc  
www  
MAR

o-SP-Brazil  
2-1009  
.com.br  
ing the